


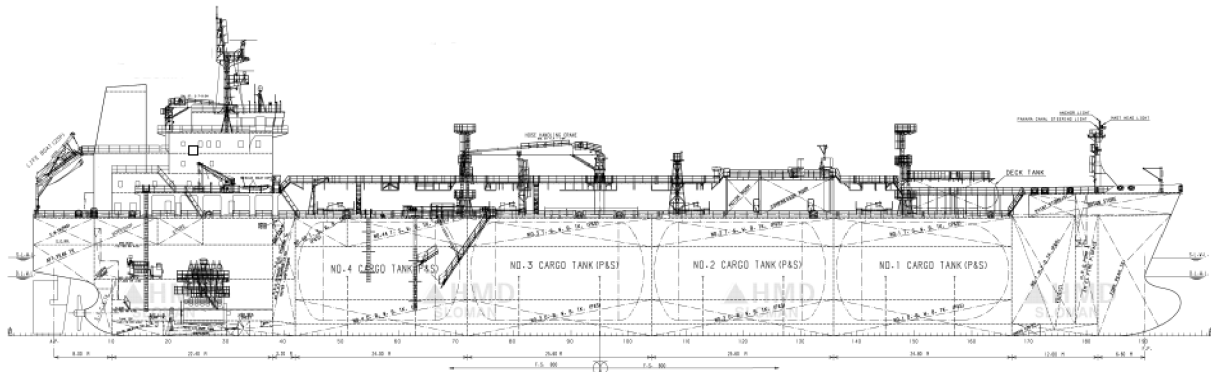

DECORA

20,318 CBM LPG CARRIER

MAIN ENGINE

HYUNDAI MAN B&W 6S-46MC-C8.1

NOM RATING : 7,860 Kw / 129 rpm

DEADWEIGHT

23,479 MT

SERVICE SPEED

15 KNOTS

CRUISING RANGE

18,500 Nm

RELIQUEFACTION PLANT

DIRECT TYPE X 2 SETS

SULZER COMPRESSORS X 3

POWER SUPPLY

HYUNDAI-HIMSEN 5H21/32 X 3 960kW (ea)

TOTAL : 3 GENERATORS 2,880 kW

CARGOTANKS

BI-LOBE X 4

INDEPENDENT TYPE C (-48° C; 5.3 BAR)

DECK TANK

154.02 CBM (-48 C; 5.3 BAR) X 1

HFO CAPACITY

2,002 CBM

MGO CAPACITY

250 CBM

CARGO SYSTEM

MAIN CARGO PUMP ELEC. MOTOR DRIVEN X 8

SVANEHOJ DEEPWELL TYPE

FW CAPACITY

347 CBM

MAIN DIMENSIONS

LOA 159.97 M

BEAM 25.63 M

DEPTH 16.40 M

DRAFT (TROPICAL) 11.15 M

DRAFT (BALLAST) 7.40 M

CLASS

LLOYD'S REGISTER

WATER BALLAST

STORAGE CAPACITY 9,229 CBM

CAPACITY PER UNIT (2) 370 CBM/HR

CARGOES

AMMONIA BUTADIENE BUTANE

PROPYLENE V.C.M. PROPANE