


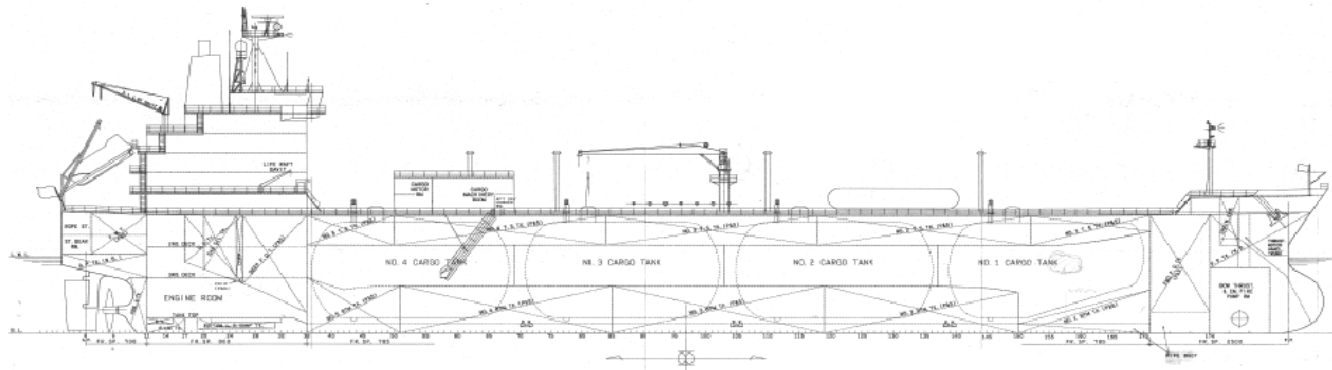

MARINER

20,510 CBM LPG CARRIER

MAIN ENGINE

MITSUBI B&W 6S-50MC

NOM RATING : 7,280 Kw / 129 rpm

DEADWEIGHT

23,272 MT

SERVICE SPEED

15 KNOTS

CRUISING RANGE

18,500 Nm

RELIQUEFACTION PLANT

DIRECT TYPE X 2 SETS

SULZER COMPRESSORS X 3

POWER SUPPLY

MAN B&W NIIGATA 6L23 / 30H X3 956 kW (ea)

TOTAL : 3 GENERATORS 2,868 kW

CARGO TANKS

BI-LOBE X 4

INDEPENDENT TYPE C (-48° C; 5.3 BAR)

DECK TANK

108.6 CBM (-48 C; 5.3 BAR) X 2

HFO CAPACITY

1,855 CBM

MGO CAPACITY

198 CBM

CARGO SYSTEM

MAIN CARGO PUMP ELEC. MOTOR DRIVEN X 8

SVANEHOJ DEEPWELL TYPE

FW CAPACITY

343 CBM

MAIN DIMENSIONS

LOA	159.0 M
BEAM	26.03 M
DEPTH	16.30 M
DRAFT (TROPICAL)	10.75 M
DRAFT (BALLAST)	5.48 M

CLASS

LLOYD'S REGISTER

WATER BALLAST

STORAGE CAPACITY	8,219 CBM
CAPACITY PER UNIT (2)	400 CBM/HR

CARGOES

AMMONIA BUTADIENE BUTANE

PROPYLENE V.C.M. PROPANE